




COUNTRY COLOUR

Variety of colours and unsurpassed durability – for all weather conditions!

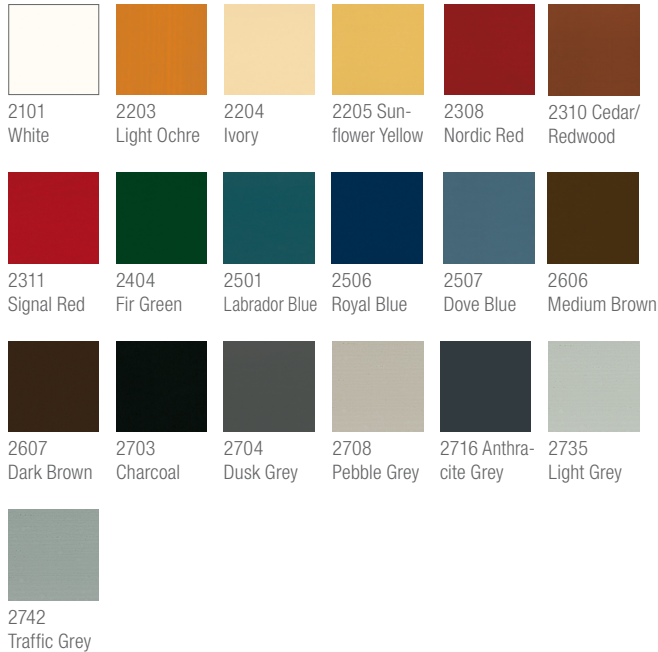

PRODUCT DESCRIPTION

Opaque, at first slightly satin-gloss then satin finish natural oil based for wood in outdoor areas. Wood tone and grain is covered. The wood structure remains noticeable.

Microporous surface allows the wood to breathe and reduces swelling and shrinkage. Water-repellent, extremely weatherproof and UV stable surface does not crack, peel, flake or blister. No sanding necessary, just simply recoat; no primer is needed. Easy and seamless application. Finish stays workable while coating.

The dry finish is safe for humans, animals and plants (resistant to saliva and perspiration acc. German DIN 53160, suitable for children's toys acc. EN 71.3).

RECOMMENDED USE

Osmo Country Colour is best suited for all wood in outdoor areas where an especially durable coating is required: timber cladding, balconies, windows and window shutters, fences, pergolas, wooden shingles, garden furniture and summer houses, carports etc. Ideal for renewing old microporous finishes and weathered wooden surfaces.

CONTAINS

Based on natural plant oils (sunflower oil, soya oil and thistle oil), iron oxide and organic pigments, titanium dioxide white pigment, siccatives (drying agents) and water-repellent additives. Dearomatized white spirit (benzene-free). Complies with Environment Canada VOC regulations (SOR/2009-264). Detailed declaration of ingredients available upon request.

TECHNICAL DATA

Specific gravity: 1.0-1.35 g/cm³
 Viscosity: 20-60s DIN EN ISO 2431/4 mm, viscid
 Odour: faint/mild, after drying odourless
 Flash point: >60°C acc. DIN EN ISO 2719

STORAGE

Up to 5 years and longer if can is kept dry and closed tightly. If thickened by frost, store for 24-36 hours at room temperature before use.



SURFACE PREPARATION

Wood surface must be clean, dry and frost-free (moisture content max. 20%).

Osmo Country Colour is ready to use. Do not thin. Stir well before use. If possible, please apply the first coat to all sides before installation.

Clean old microporous stains thoroughly. Old paints and lacquers must be completely removed. As a general rule, wear a dust mask during sanding works.

The finished surface is influenced by several factors, including the condition of the wood. Therefore, a trial application is always required, especially for unfamiliar surfaces.

If additional protection against blue stain, rot and insects is desired, pre-treat the wood if possible on all sides with Osmo WR Base Coat.

DIRECTIONS FOR USE

With Osmo Flat Brush or Osmo Microfibre Roller, apply thinly and evenly to the clean and dry wood along the wood grain and spread well.

Allow to dry for approx. 10-12 hours under good ventilation. After drying, apply a second coat – also thinly.

For renovation works, one coat applied to the clean and dry surface is usually sufficient.

NOTE

Osmo Country Colour can also be sprayed. Due to the multitude of various machine types, exact specifications for pressure and spray heads cannot be given and always have to be determined for each individual application. However, we should like to point out that optimal adhesion and surface quality is only guaranteed by spreading out the finish additionally with a natural bristle brush, e.g. Osmo Flat Brush.

While spraying, please ensure correct use of protective equipment. Avoid inhaling aerosols at all costs.

CLEANING OF TOOLS

With Osmo Brush Cleaner and Thinner (free of aromatic compounds).

DRYING TIME

Approx. 10-12 hours (normal climatic conditions, 23 °C/ 50 % rel. humidity). Lower temperatures and/or higher air humidity can increase the drying time. Ventilate well while drying.

COVERAGE

1 litre covers approx. 280 ft² (26 m²) with one coat. Coverage depends significantly on the condition of the wood. All information refers to smooth and planed/sanded surfaces.

Other surfaces may lead to differences in coverage.

NOTE

If surfaces in outdoor areas (e.g. windows, cladding) should have additional protection, apply one top coat of Osmo UV-Protection-Oil Clear (410 without film protection or 420 with film protection) after thoroughly drying. This protects against dirt contamination and extends the life of the finish.

For Country Colour White 2101, please use Natural Oil Woodstain White 900.

Country Colour, which has been trusted for over decades, is also available in the colour of your choice.

Starting from 2.5 litres per colour tone, available in 186 RAL Classic and 1950 NCS colour tones, as well as with biocidal film protection additives.

Many wood species contain water-soluble coloured extractives which may leach out naturally when weathered.

HAZARD STATEMENTS



CAUTION

READ INSTRUCTIONS BEFORE USING

DANGER OF COMBUSTION. Do not get in eyes. Do not get on skin or clothing. Keep out of reach of children. Use only in a well-ventilated area. Keep away from flames or sparks. Materials such as rags used with this product may begin to burn by themselves. After use, put rags in water or lay flat to dry, then discard. **FIRST AID TREATMENT.** Contains aliphatic hydrocarbons. If swallowed, call a Poison Control Centre or doctor immediately. Do not induce vomiting. If in eyes, rinse with water for 15 minutes. If on skin, rinse well with water.

DISPOSAL

Dispose of leftover product and completely emptied packaging according to local official guidelines (waste code number 08 01 11). Only completely emptied cans can be recycled.



COLOUR TONES

- 2101 White
- 2203 Light Ochre
- 2204 Ivory
- 2205 Sunflower Yellow
- 2308 Nordic Red
- 2310 Cedar/Redwood
- 2311 Signal Red
- 2404 Fir Green
- 2501 Labrador Blue
- 2506 Royal Blue
- 2507 Dove Blue
- 2606 Medium Brown
- 2607 Dark Brown
- 2703 Charcoal
- 2704 Dusk Grey
- 2708 Pebble Grey
- 2716 Anthracite Grey
- 2735 Light Grey
- 2742 Traffic Grey

CAN SIZES

750m L; 2.50 L; 25 L

The above mentioned information is provided to the best of our knowledge however without any liability.

Version 09/18