

2K Wood Oil

Osmo 2K Wood Oil is a Greenguard GOLD certified, solvent-free Hardwax-Oil that is made from renewable raw materials and meets the highest standards for indoor air quality. Built for professionals who demand speed, durability, and flawless results in a single coat, Osmo 2K Wood Oil delivers exceptional performance with outstanding coverage.

The advanced two-component system requires less than half the hardener of other single-coat finishes, yet achieves remarkable resistance to wear, water, and household chemicals. Unlimited colour combinations are available by mixing our 11 standard colours and one clear to create custom tones tailored to any project.



Solvent-free and Greenguard GOLD certified



Based on renewable raw materials



Microporous and breathable surface



Resistant to wine, beer and cola



Dry time 12-24 hours



430-538 ft²/L (40-50 m²/L)



Water and dirt repellent



Spot applications possible




Clear Matte
6100



White
6111



Silver Grey
6112



Graphite
6114



Cherry
6116



Light Grey
6118



Natural
6119



Garnet
6138



Havanna
6141



Cognac
6143



Tobacco
6164




Black
6190

*Colours may vary due to printing. Swatches recommended before use.

GREENGUARD GOLD CERTIFIED

Osmo 2K Wood Oil is GREENGUARD Gold Certified by UL Solutions, confirming it meets some of the industry’s most rigorous standards for low chemical emissions and indoor air quality.

Recognized for use in sensitive environments such as schools, healthcare facilities, and homes, this independent certification gives architects, designers, builders, and homeowners added confidence in a finish that combines exceptional performance with healthier indoor spaces.



Custom mix our most popular colour tones

2K Wood Oil’s 11 coloured and one colourless variant can be mixed together to offer complete design freedom. Colour matching and custom finishing has never been so easy!



LIGHT TONES



NEUTRAL TONES




6100 Clear Matte + 6111 White
(Mixing ratio 1:1)



6100 Clear Matte + 6118 Light Grey
(Mixing ratio 1:1)



6111 White + 6112 Silver Grey
(Mixing ratio 1:1)



6111 White + 6118 Light Grey
(Mixing ratio 1:1)



6112 Silver Grey + 6118 Light Grey
(Mixing ratio 1:1)



6111 White + 6141 Havanna
(Mixing ratio 1:1)



6111 White + 6143 Cognac
(Mixing ratio 1:1)



6111 White + 6164 Tobacco
(Mixing ratio 1:1)




6112 Silver Grey + 6119 Natural
(Mixing ratio 1:3)



6118 Light Grey + 6141 Havanna
(Mixing ratio 1:1)



6118 Light Grey + 6143 Cognac
(Mixing ratio 1:1)



6118 Light Grey + 6164 Tobacco
(Mixing ratio 1:1)



6119 Natural + 6141 Havanna
(Mixing ratio 2:1)



6119 Natural + 6141 Havanna
(Mixing ratio 3:1)



6119 Natural + 6143 Cognac
(Mixing ratio 1:1)



RED TONES



6100 Clear Matte + 6116 Cherry
(Mixing ratio 1:1)



6100 Clear Matte + 6141 Havanna
(Mixing ratio 1:1)



6100 Clear Matte + 6143 Cognac
(Mixing ratio 1:1)



6100 Clear Matte + 6164 Tobacco
(Mixing ratio 1:1)



6111 White + 6116 Cherry
(Mixing ratio 1:1)



6116 Cherry + 6141 Havanna
(Mixing ratio 1:1)



6116 Cherry + 6164 Tobacco
(Mixing ratio 1:1)



6118 Light Grey + 6116 Cherry
(Mixing ratio 1:1)




BROWN TONES




6112 Silver Grey + 6143 Cognac
(Mixing ratio 1:1)



6114 Graphite + 6141 Havanna
(Mixing ratio 1:1)



6114 Graphite + 6143 Cognac
(Mixing ratio 1:1)



6114 Graphite + 6164 Tobacco
(Mixing ratio 1:1)



6141 Havanna + 6164 Tobacco
(Mixing ratio 1:1)




6143 Cognac + 6164 Tobacco
(Mixing ratio 1:1)



GREY TONES




BLACK TONES



6111 White + 6114 Graphite
(Mixing ratio 1:1)



6112 Silver Grey + 6114 Graphite
(Mixing ratio 1:1)




6114 Graphite + 6118 Light Grey
(Mixing ratio 1:1)



6114 Graphite + 6118 Light Grey
(Mixing ratio 1:2)



6100 Clear + 6190 Black
(Mixing ratio 1:1)



6111 White + 6190 Black
(Mixing ratio 1:1)



6112 Silver Grey + 6190 Black
(Mixing ratio 1:1)

Simple Application

Only one coat needed, saving time and allowing only one day for application. Mix the two components together for immediate use.

Durable Finish

One coat offers astonishing wear resistance and protection making it ideal for high-traffic areas such as flooring and stairs.

High Coverage

One litre covers approx. 430-538 ft² (40-50 m²).

Suitable for Commercial Interiors

Certified Greenguard GOLD, 2K Wood Oil is solvent-free and low-maintenance, making it ideal for the use in schools, restaurants and other public interiors.


Compatible

Suitable for almost all wood species, including oily and resinous woods. Small damages and scratches can easily be spot repaired without any noticeable transitions.

2K Wood Oil



Available in 375mL and 1L

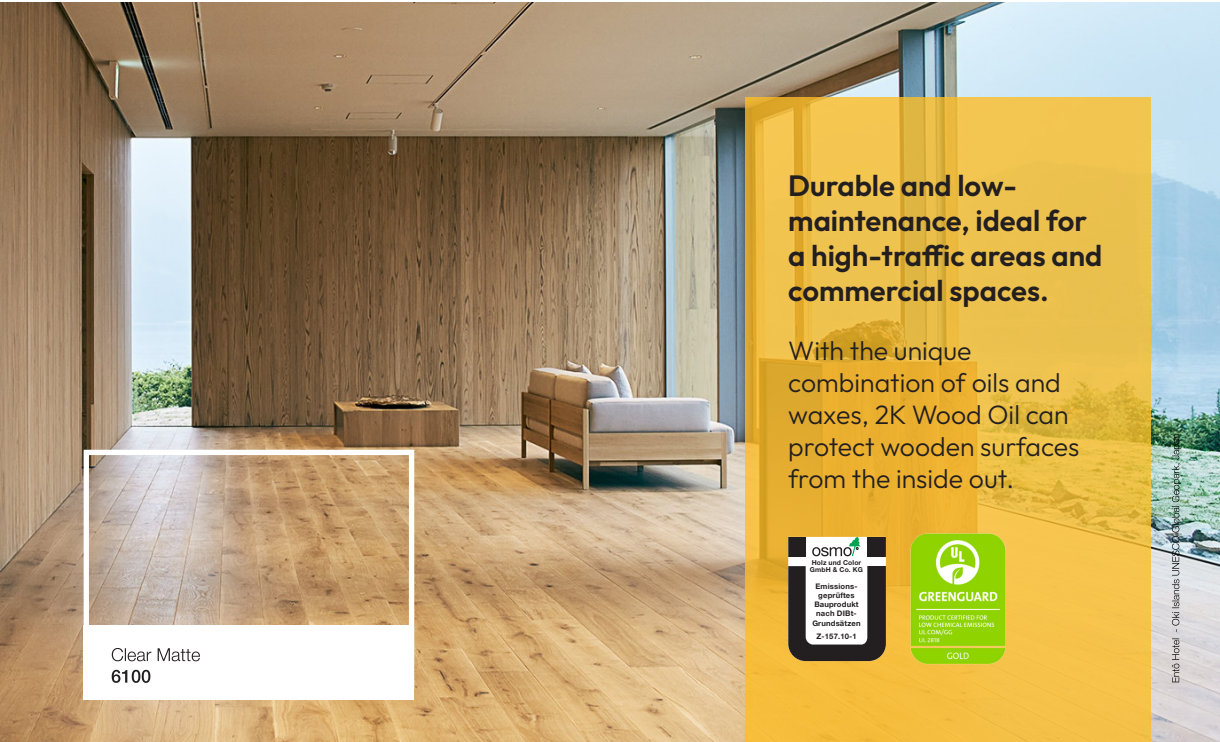

Durable and low-maintenance, ideal for a high-traffic areas and commercial spaces.

With the unique combination of oils and waxes, 2K Wood Oil can protect wooden surfaces from the inside out.



Clear Matte
6100

A GREENGUARD GOLD CERTIFIED AND SOLVENT-FREE HARDWAX OIL BASED ON RENEWABLE RAW MATERIALS

Osmo 2K Wood Oil is a two-component, solvent-free hardwax-oil based on renewable raw materials. Suitable for all wood flooring, stairs, and furniture surfaces, ideal for oily and resinous hardwoods and commercial interiors.

Unlimited colour tones

High coverage

Suitable for commercial use

Greenguard GOLD certified

12 - 24 hour dry time

Water and dirt repellent

Only one coat needed



Application Method

Finished surface in 1 day, 1 coat required



Double Blade Trowel



Microfibre Roller



White SuperPad on Hand Applicator or Floor Buffer



Scan with your smartphone for more information

1. Shortly before application, mix the hardener and the oil together (mixing ratio 1:8 vol.%) ensuring both components are thoroughly combined. Do not thin.

Important: Product lifespan after mixing is approx 3-4 hours. Leftover mixed product after this time will expire and must be disposed of appropriately.

2. With an Osmo Double Blade Trowel or Osmo Microfibre Roller, distribute 2K Wood Oil across the surface. On chamfered flooring, apply 2K Wood Oil in sections thinly with Osmo Microfibre Roller, without filling the joints.

3. Wait approx. 20-40 minutes for the oil to penetrate into the wood.

4. Buff oil into the wood and even out the surface with a single disc machine with a white pad. For furniture use the Hand Applicator and white pad.

Note: If the white pad leaves streaks due to too much product being applied, we recommend replacing the pad and continuing to buff with a new pad until streaks have disappeared.

5. Drying time approx 12 hours with hardener (normal climatic conditions, 23 °C/50 % rel. humidity) or 24 hours without hardener. Lower temperatures and/or higher humidity can affect drying time. Ensure space is well ventilated.

6. A second coat is optional and will change the finish from matte to satin, if preferred. Simply repeat the steps above to apply.

To prevent a possible pressure build-up in the container, allow the oil and hardener mixtures to completely react before closing the lid (approx. 12-16 hrs).

Osmo Canada (East) - 420 Thompson Drive, Unit 2, Cambridge, ON, N1T 2K8
Osmo Canada (West) - 8712 48 Ave NW, Unit 105, Edmonton, AB, T6E 5L1
+1-844-OSMO-CAN (6766-226)
info@osmo.ca
www.osmo.ca



2K Wood Oil

One-coat
Solvent-free
11 colours, 1 clear

For wooden flooring,
stairs and furniture



GREENGUARD

PRODUCT CERTIFIED FOR
LOW CHEMICAL EMISSIONS
UL.COM/CG
UL 2818

GOLD

